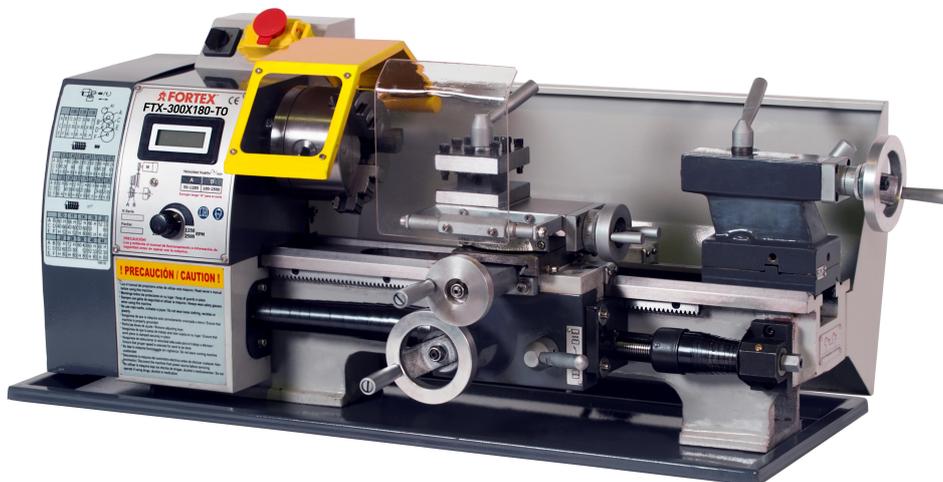


FORTEX®

REFERENCIA

441230000

CÓDIGO EAN

8423640400238

ARTÍCULO

LATHE FTX-300X180-TO VARIO 230V/F1

DESCRIPCIÓN

Tones of great versatility, high precision and robust design. Completely equipped. Two mechanical speeds and electronic speed changer. Overload protection. Microinterruptor stop by opening of pulley cover or protective dish. Tail and turret dish protector. Automatic longitudinal advance. Emergency stop. Motor without buckles. Machines manufactured according to CE standards.

ARTÍCULO

LATHE FTX-300X180-TO VARIO 230V/F1

DATOS TÉCNICOS	
Coordinate viewer X/Y	NO
Alimentación	230V/F1
Potencia	0.75 - 1 Kw-Hp
Change speeds	VARIABLE
Diameter on bench	180 mm.
Diameter on neckline	- mm.
Diameter on cart	110 mm.
Banking width	100 mm.
Inner diameter spindle	21 mm.
Distance between points	300 mm.
Point	MT3
Cone contrapoint	MT2
Diameter counterpoint	22 mm.
Tour counterpoint	60 mm.
Número de velocidades	2 - VARIABLE
Rango velocidades	50 - 1250 / 100 - 2500 r.p.m.
Longitudinal forward range	0.08 - 0.16 mm/rev.
Cross-sectional forward range	- mm/rev.
A. Rapid longitudinal intermediate car	- m/min.
A. Cross-sectional carriage	- m/min.
Range metric steps	10 TIPOS / 0.5 - 3 mm.
Rank inches	8 TIPOS / 8 - 44 tpi
Range diametric steps	- d.p.
Range modular steps	- m.p.
Peso Neto/Bruto	146 / 160 Kg.
Dimensiones	800X480X460 mm.