
FORTEX®

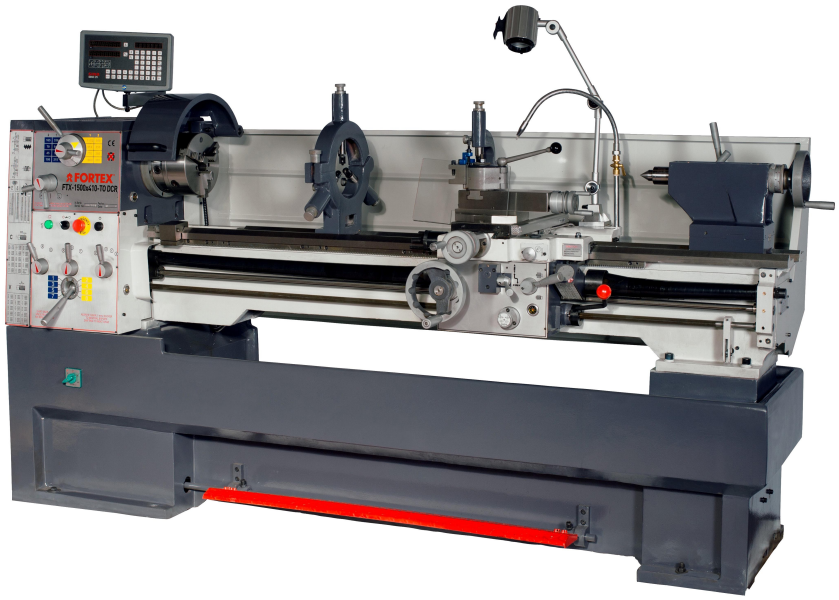

REFERENCIA	CÓDIGO EAN
441028000	8423640293250

ARTÍCULO

Lathe FTX-1500X410-TO DCR 400V / F3 4.5hp-16 Vel. + Dro + TCRE

DESCRIPCIÓN

Professional lathe, robust design with laminated and rectified prismatic guides. With a shaft of guide for automatic advances. Stopper microswitch by opening pulley cap or plate protector. Clipping plate protector and turret. Emergency stop Foot brake. Dial Thread Indicator. Race stopper longitudinal carriage stop. Machines manufactured according to EC standards.

ARTÍCULO

Lathe FTX-1500X410-TO DCR 400V / F3 4.5hp-16 Vel. + Dro + TCRE

DATOS TÉCNICOS	
Visualizador de coordenadas X/Y	SI
Alimentación	400V/F3
Potencia	2.2 / 3,3 - 3 / 4,5 kW-HP
Cambio velocidades	ENGRANAJES
Diámetro sobre bancada	410 mm.
Diámetro sobre escote	580 mm.
Diámetro sobre carro	255 mm.
Ancho de bancada	250 mm.
Diámetro interior husillo	52 mm.
Distancia entre puntos	1500 mm.
Cono punto	MT6
Cono contrapunto	MT4
Diámetro contrapunto	50 mm.
Recorrido contrapunto	120 mm.
Número de velocidades	16
Rango velocidades	42 - 1800 r.p.m.
Rango avance longitudinal	0,05 - 1,7 mm/rev.
Rango avance transversal	0,025 - 0,85 mm/rev.
A.Rápido longitudinal carro intermedio	- m/min.
A.Rápido transversal carro intermedio	- m/min.
Rango pasos métricos	39 TIPOS / 0,2 - 14 mm.
Rango pasos pulgadas	54 TIPOS / 2 - 72 tpi
Rango pasos diametrales	21 TIPOS / 8 - 44 d.p.
Rango pasos modulares	15 TIPOS / 0,3 - 3,5 m.p.
Peso Neto/Bruto	1300 / 1650 Kg.
Dimensiones	2560x1140x1640 mm.