


FORTEX®

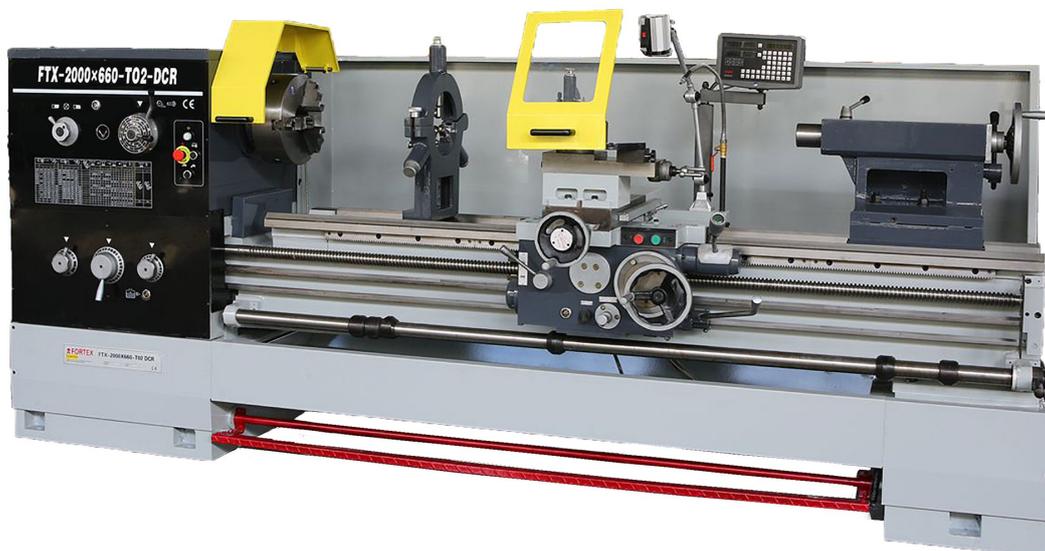

REFERENCIA

441009200

CÓDIGO EAN

8423640293915

ARTÍCULO

Lathe FTX-2000X660-TO2 DCR 400V / F3 * 10HP-12 Vel.

DESCRIPCIÓN

Lathes to work metals, professional use, robust design with laminated and rectifi prismatic guides. Truck guides tempered to HRC43. With a shaft of guide for automatic advances. Longitudinal and cross-cutting fast tour of the intermediate carriage. Stopper microswitch by opening pulley cap or plate protector. Clipping plate protector and turret. Emergency stop Foot brake. Dial Thread Indicator. Race stopper longitudinal carriage stop. Machines manufactured according to EC standards.

ARTÍCULO

Lathe FTX-2000X660-TO2 DCR 400V / F3 * 10HP-12 Vel.

DATOS TÉCNICOS

Coordinate viewer X/Y	IF
Alimentación	400V/F3
Potencia	7,5 - 10 Kw-Hp
Change speeds	ENGRATMENTS
Diameter on bench	660 mm.
Diameter on neckline	870 mm.
Diameter on cart	420 mm.
Banking width	405 mm.
Inner diameter spindle	105 mm.
Distance between points	2000 mm.
Point	113
Cone contrapoint	MT5
Diameter counterpoint	75 mm.
Tour counterpoint	150 mm.
Número de velocidades	12
Rango velocidades	36 - 1600 r.p.m.
Longitudinal forward range	0,063 - 2.52 mm / rev.
Cross-sectional forward range	0.027 - 1.07 mm / rev.
A. Rapid longitudinal intermediate car	4.5 m / min.
A. Cross-sectional carriage	1.9 m / min.
Range metric steps	22 Types / 1 - 14 mm.
Rank inches	25 Types / 28 - 2 TPI
Range diametric steps	24 types / 56 - 4 d.p.
Range modular steps	18 Types / 0.5 - 7 m.p.
Peso Neto/Bruto	3400 / 3800 Kg.
Dimensiones	3500X1100X1650 mm.