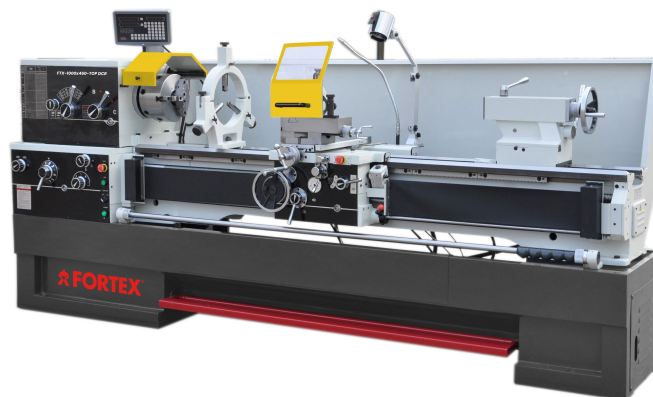


**FORTEX®****REFERENCIA**

441027500

**CÓDIGO EAN**

8423640293991

**ARTÍCULO**


FTX-1500X460-Top DCR 400V / F3 7.5hp + Dro + TCRE

**DESCRIPCIÓN**

Industrial use lathe, designed for demanding machining work with maximum stability, safety and precision. Robust design, with Laminated and rectified prismatic guides, which ensure a high rigidity and smooth displacement of the car. Dedicated guide axis for automatic advances, optimizing efficiency in prolonged works. Safety microswitch That stops the operation when opening the pullest lid or the plate protector. Claw and turret protector, providing greater security to the operator during work. Emergency stop button, accesible y confiable ante cualquier situación crítica. Foot brake, which allows you to quickly stop the spindle without using your hands. Dial Thread Indicator, for precise and visual control of the thread passage. Race stop for longitudinal carriage feed, Ideal for repetitive and controlled machining. Manufactured under CE Normative, complying with the highest European standards of safety and quality.

**FORTEX®**
**REFERENCIA**

441027500

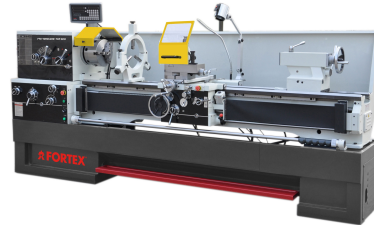
**ARTÍCULO**

FTX-1500X460-Top DCR 400V / F3 7.5hp + Dro + TCRE

**DATOS TÉCNICOS**

|  |                             |
|--|-----------------------------|
| Visualizador de coordenadas X/Y        | SI                          |
| Alimentación                           | 400V/F3                     |
| Potencia                               | 5.5 - 7.5 kW-HP             |
| Cambio velocidades                     | ENGRANAJES                  |
| Diámetro sobre bancada                 | 460 mm.                     |
| Diámetro sobre escote                  | 700 mm.                     |
| Diámetro sobre carro                   | 290 mm.                     |
| Diámetro interior husillo              | 80 mm.                      |
| Distancia entre puntos                 | 1500 mm.                    |
| Cono punto                             | Mt7                         |
| Cono contrapunto                       | MT5                         |
| Diámetro contrapunto                   | - mm.                       |
| Recorrido contrapunto                  | 130 mm.                     |
| Número de velocidades                  | 12                          |
| Rango velocidades                      | 25 - 1800 r.p.m.            |
| Rango avance longitudinal              | 0.04 - 2.46 mm / rev.       |
| Rango avance transversal               | 0.02 - 1.23 mm / rev.       |
| A.Rápido longitudinal carro intermedio | - m/min.                    |
| A.Rápido transversal carro intermedio  | - m/min.                    |
| Rango pasos métricos                   | 24 Types / 0.5 - 20 mm.     |
| Rango pasos pulgadas                   | 61 Types / 1-5 / 8 - 72 TPI |
| Rango pasos diametrales                | 45 types / 96 - 3 1/4 d.p.  |
| Rango pasos modulares                  | 20 Types / 0.25 - 10 m.p.   |
| Peso Neto/Bruto                        | 2480/2730 kg.               |
| Dimensiones                            | 3000x1150x1680 mm.          |